


CRUSHING RANGE

BISON 120

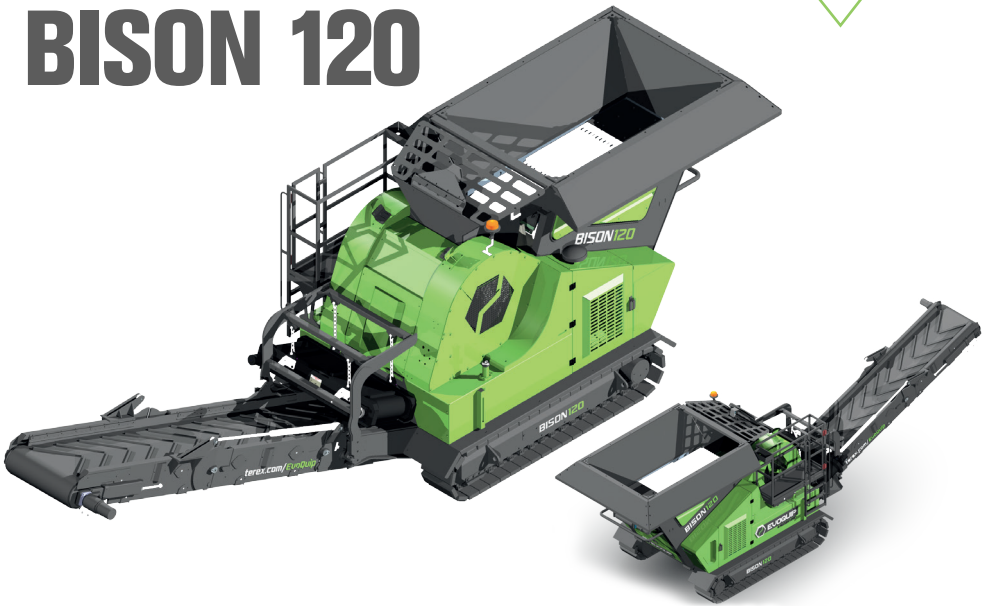

HOPPER / FEEDER

2.3m³ (3yd³) Hopper capacity
Grizzly feeder as standard
30mm (1-1/4") Nominal spacing grizzly

JAW CRUSHER

680mm x 400mm (27" x 16") Jaw Inlet
CSS Range: 20mm to 80mm (3/4" to 3-1/4")
Hydraulic Jaw adjustment

POWERUNIT

Tier 3: 61kW/ 83Hp engine
Tier 4: Final: Stage IIIB 52kW/70Hp Isuzu engine
Hydraulic drive of crusher

OUTPUT POTENTIAL

Up to 80tph / 90 US tph

CONVEYORS

800mm (32") Wide product conveyor
Product conveyor discharge height: 1.9m (6'2")
Hydraulic folding as standard for transport

GENERAL

Jaw level sensor as standard and remote control as standard

TRANSPORT

Transport dimensions

	LENGTH	WIDTH	HEIGHT
Track Unit	5.58m (18' 4")	2.28m (7'6")	2.74m (9')

Weight: 12,000kgs (26,455lbs)